



Dell UltraSharp 30 Monitor with PremierColor UP3017



PremierColor coverage offers every color professional the ideal color space on a 30" Dell UltraSharp monitor.

PremierColor — vivid, accurate color with broad coverage of professional standards

Dell PremierColor offers color professionals the tools they need for color-critical projects.

- Get precise, accurate colors, right out of the box with a $\Delta E < 2$ for AdobeRGB and sRGB.
- Work with a broad color spectrum thanks to wide coverage of color industry standards within four color spaces: Adobe RGB², sRGB, REC709, and DCI-P3 on a clear, expansive 30" 2560 x 1600 screen.
- Enjoy easy, user-enabled color customization with Custom Color mode, SDK, and the optional X-rite i1Display Pro colorimeter³ for extra precise calibration.
- See a high level of detail even in dark areas with 1.07 billion colors and experience consistent colors across an ultrawide viewing angle — great for collaboration.



Superb usability

Great viewing comfort and flexibility with extensive features so you can work the way you like.

- Easily extend your view to a second screen by daisy chaining the monitors using DisplayPort 1.2¹ and DisplayPort-out.
- Conveniently display and manage content from two PC sources with Picture-by-Picture (PBP), Picture-in-Picture (PIP) and KVM features.
- Experience uncompromising picture quality thanks to a wide range of connectivity ports.
- Adjust to your most comfortable position with height adjustable, tilt, swivel and pivot features.

Unmatched reliability

Comes with Dell's high reliability promise.


- From the #1 monitor brand worldwide for three consecutive years*.
- Enjoy peace of mind from Dell's commitment to quality and customer satisfaction with the Premium Panel⁴ Guarantee.
- Minimize downtime with Dell's 3-year Advanced Exchange Service⁷.

Thank you
for making
Dell Monitors


#1
worldwide*

For more information visit
www.dell.com/monitors

Easily adjust the panel to your preferred viewing position.

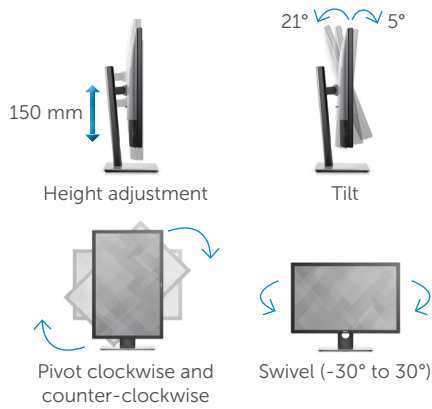

Connectors

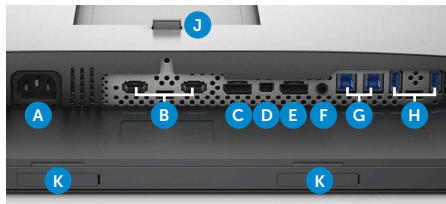

- A** AC Power
- B** HDMI
- C** DisplayPort (in)
- D** Mini DisplayPort (in)
- E** DisplayPort (out)
- F** Audio line-out
- G** USB upstream
- H** USB downstream
- I** USB downstream (BC1.2)***
- J** Stand lock
- K** Dell soundbar mounting slots



What's in the box?

Components

- Monitor panel
- Stand

Cables

- Power cable (varies by country)
- DP to mDP, and USB 3.0 upstream cables

Documentation

- Factory color calibration report
- Drivers and documentation media (CD)
- Quick Setup Guide
- Safety, environmental and regulatory information



¹ Dell PremierColor

² Dell monitors are #1 Worldwide for 3 consecutive years. Source: IHS Global Inc. Desktop Monitor Market Tracker (2013 to 2015) ID#G16000073

³ Registered in US and Canada only.

⁴ For charging BC1.2 devices and also supports up to 2A when powering standard USB devices.

⁵ DisplayPort 1.2: Supports High Bit Rate 2 (HBR2) and Multi-stream transport (MST).

⁶ AdobeRGB color gamut is based on CIE1931 test standard.

⁷ Dell recommends optional X-Rite i1Display Pro colorimeter for generating custom palettes. Optional and sold separately. You can purchase the X-Rite i1Display Pro colorimeter at Dell.com (select countries) or from any X-Rite online reseller.

⁸ In the event you discover even one bright pixel on the Dell UltraSharp 30 Monitor during the Limited Hardware Warranty period, a free panel exchange is guaranteed. (see pixel panel info located on Dell.com web page for complete details): <http://support.dell.com/support/topics/global.aspx/support/kcs/document?docid=414288>

⁹ EPEAT Gold registered in the U.S. EPEAT registration varies by country. See www.epeat.net for registration status by country.

¹⁰ USB 3.0 does not support graphics output. USB 3.0 rate of data transfer can only be achieved with a computer that supports USB 3.0.

¹¹ Advanced Exchange Service: Replacement part/unit dispatched, if needed, following completion of phone/online diagnosis. Fee charged for failure to return defective unit. Availability varies. Other conditions apply.

¹² For a copy of the Limited Hardware Warranty, write to Dell USA LP, Attn: Warranties, One Dell Way, Round Rock, TX 78682 or see dell.com/warranty.

Dell UltraSharp 30 Monitor with PremierColor | UP3017

Display

| | |
|---|--|
| Model number | UP3017 |
| Viewable image size (diagonal) | 75.62 cm (30 inches) |
| Active display area | |
| Horizontal | 641.3 mm (25.2 inches) |
| Vertical | 400.8 mm (15.8 inches) |
| Maximum resolution | 2560 x 1600 at 60 Hz |
| Aspect ratio | 16:10 |
| Pixel pitch, PPI | 0.251 mm x 0.251 mm, 101 ppi |
| Brightness (typical) | 350 cd/m ² |
| Color gamut (typical) | 99% AdobeRGB ² , 99% sRGB coverage (deltaE of less than 2), 99% REC709, 99% DCI-P3 |
| Color depth | 1.07 billion colors |
| Contrast ratio (typical) | 1,000:1 (typical) |
| Viewing angle (typical) (vertical/horizontal) | 178°/178° |
| Response time (typical) | Fast mode: 6 ms gray-to-gray Normal mode: 8 ms gray-to-gray |
| Panel technology, surface | In-plane switching, anti-glare with 3H hardness |
| Backlight | LED |
| Bezel color | Black |
| Extra features | Color calibration with SDK software and optional X-rite i1Display Pro colorimeter, KVM capabilities, remote asset management via Dell Command Monitor, Dell Display Manager compatibility via Easy Arrange (PbP, PiP), Comfortview and flicker-free screen |

Connectivity

| | |
|--------------------------|---|
| Connectors | DP 1.2 ⁵ (HDCP 1.4), mini-DP (HDCP 1.4), DP 1.2 (out) with MST (HDCP 1.4); 2 x HDMI 1.4 (HDCP 1.4), 4 x USB 3.0 ⁶ including 2 x USB 3.0 with BC1.2 charging capability at 2A, 2 x USB 3.0 upstream ports (KVM), 1 x Analog 2.0 audio line out (3.5 mm jack) |
| Dell soundbar (optional) | AC511 |

Features

| | |
|-----------------------|---|
| Stand | Tilt (Typical: 5° forward or 21° backward), height adjustable stand (150 mm), swivel, pivot (clockwise and counterclockwise), and built-in cable management |
| Security | Security lock slot (security lock not included) |
| VESA mounting support | 100 mm x 100 mm |

Power

| | |
|--|---|
| AC input; voltage/frequency/ current (typical) | 100 to 240 VAC/50 or 60 Hz ± 3 Hz/1.6 A (maximum) |
| Power consumption (normal operation) | 54W (typical); 38.2W (ENERGY STAR [®]) |
| Power consumption (active-off mode) | <0.3 W |

Dimensions (with stand)

| | |
|--------------------------------|---|
| Height (compressed ~ extended) | 482.3 mm (18.99 inches) ~ 632.3 mm (24.89 inches) |
| Width | 686.9 mm (27.04 inches) |
| Depth | 217.0 mm (8.54 inches) |

Weight

| | |
|--------------------------------|---------------------|
| Weight (panel only – no stand) | 6.49 kg (14.31 lb) |
| Weight (with stand) | 9.59 kg (21.14 lb) |
| Shipping weight | 13.10 kg (28.88 lb) |

Standard service plan

- 3 years Advanced Exchange Service⁷ & Limited Hardware Warranty⁸
- Premium Panel Guarantee⁴

Environmental compliance

ENERGY STAR[®], EPEAT[®] Gold⁹, TCO Certified Displays, BFR/PVC-free monitor (excluding cables), RoHS, Arsenic-free glass and mercury-free panel, more than 25% post consumer recycled materials in chassis